

A Study of Glass fiber Optimized Strengthened Polymeric Composite Material Using End Mill Taguchi Concept

Manoj Kumar Nayak¹, Ashok Kumar Pradhan²

1(Department of Mechanical Engineering ,Gandhi Engineering College , India)

2(Department of Mechanical Engineering ,Gandhi Institute For Technology ,India)

Abstract: Creation and assembling process manages discussion of crude materials contribution to completed item according to required dimensional details and effectively utilizing late innovation The metal cutting fundamental pursue high metal expelling rate and best item quality the serious issue in accomplishing high efficiency and best quality is short life expectancy of hardware To improve the apparatus life numerous new material are grown so needs to fulfill the market need and serious cost for this there ought to be legitimate authority over different cost engaged with machining na medications as material cost, work cost and toolin g cost. The material expense can be constrained by utilizing extraordinary material which meets every single required property with marked down cost. The current work is centered around the influenc e of cutting pace, feed rate and profundity of cut on the delaminating harm a d surface harshness on Glass Fiber Reinforced Polymeric composite material (GFRP) During end processing. Taguchi structure method is utilized to examine the machining characters of GFRP. In this work, tests must be completed according to the Taguchi exploratory structure and L9 symmetrical exhibit was utilized to contemplate the impact of v arious mix of procedure parameter on surface quality. Investigation of change (ANOVA) test is to be directed to decide the essentialness of each procedure parameter on Milling. This work is helpful in choosing optimum estimation of different procedures. Parameter that would limit the push power and torque as well as lessen the delimitation and improve the nature of surface machined region.

I. Introduction

In recent years, fiber reinforced plastics (GFRPs) are continuously replacing traditional engineering materials because of their superior advantage over other engineering material. The advantage includes high strength to weight ratio, high fracture toughness, and excellent corrosion and thermal resistance. The glass fiber reinforced plastic composite is used in various field like Aerospace, Automobile, Chemical industries, Off shore power plants, Refinery, Oil and Gas, Pulp and paper, Waste and waste water etc. The application filed of FRP composite, expands the opportunity of machining such as cutting off, drilling, milling, turning etc, and has increased for its fabrication. However, the users of FRP have faced difficulties to machine it. Conventional materials cannot be applied to such new materials, of which machinability is completely different from that of conventional material.

1.1 Glass Fiber Reinforced Plastics (GFRP)

Glass is the most common fiber used in polymer matrix composites (PMC). Its advantages include its high strength, low cost, high chemical resistance, and good insulating properties. The draw backs include low elasticity, poor adhesion in polymers, high specific gravity, sensitivity to abrasion and low fatigue strength. The main types are E-glass also called “fiber glass” and S-glass. The E in glass stands from S and E for electric many other S-glass stand as compared aerospace application Glass fiber (a) Choppy Polymers are Bond, while the bond. Resins are insoluble thermo plastics are weak clued epoxies include pone sulfide designed for such as decor content of s and has h are classified further cure as weak k and o, polyester poly ethylene, Roving glass fiber as thermos the chains ark and forma of the s, polystyrene

Application structural trains its s strength e glass fiber in various f sets and there are rigid job able at high Waals type, and polythene polymeric e, polyether .It is use in various f (b) plastics with strength temperatures. Typical mode, typical either-ketone it is used for s. The S I h temperature mainly forms. The number of load carrying elements increases in a material, its strength increases. Also the tensile strength of the composites increases with increasing the fiber volume fraction. The efficiency of load transfer between the matrix and reinforcement depends directly on the bonding which in turn depends on wetting of surface. The non-uniform distribution of particles may reduce wetting and bonding, and as a result of excessive particles that are not well dispersed in the polymer defects will be created in the matrix, and decreases the tensile strength In general, the clustering or entanglement of particles and or fibers in some areas the irregularities may create resin poor and weaken the forces of adhesions well as creating many of defects within the composites and other defects formed within the fiber layer itself and that this will lead to the generation of f Glass Fiber Reinforced

Polymer Composite Prepared by Hand Layup Method many areas to focus the stresses which accelerate the process of failure of the sample and making the material behave as a brittle the tensile strength of the composite has been illustrated. Particle fillers (especially ceramics) may act as point for a localized stress concentration, from which the failure will begin, also it may help in the reduction of elasticity of material and reducing the deformability of matrix and in turn the ductility, so that the composite tends to form a weak structure also, the bad distribution of filler reduce the ability of matrix to absorb energy and thereby reducing the toughness, so impact energy decrease. Comparison of impact strength for GFRP composites. The decrease in the fracture toughness may be related to the bond weakness between the matrix and the particulate filler. HR compared to the maximum value of 71 HR for the addition of filler material. The reason for the increased value of hardness is due to the increased cross-linking and stacking which reduces the movement of polymer molecules and making it to become more resistant to the penetration of indenter. Comparison of hardness value in GFRP composites show that the compressive strength was found high for the filler content 25%. Having filler content 25%, the glass fiber reinforced polymer composite gives the highest compressive strength 285 N/mm². Comparison of compressive strength for GFRP composites. In general, the clustering or entanglement of particles in some areas and the irregularities may create resin poor areas and so weaken the forces of adhesion and this will lead to the generation of many areas to focus the stresses which accelerate the process of failure of the sample and making the material behave as a brittle.

1.2 Glass Fiber in Various Form

The most widely used matrices for advanced composites have been the epoxy resins. These resins cost more than polyesters. More than two thirds of the polymer matrices used in aerospace applications are epoxy based only they are widely used due to the following advantages.

1. High strength.
2. Low viscosity and low flow rates which allow wetting of fibers and prevent alignment of fibers during curing.
3. Low shrink rates which reduce the tendency of gaining large shear stress of the bond between epoxy and its reinforcement.
4. Resistance to creep and fatigue.
5. Resistance to solvents and chemicals.
6. Good electrical resistance.
7. Epoxies do have few inherent disadvantages also,
8. Resins and curatives are toxic in uncured form.
9. Moisture absorption resulting into change in dimensions and physical Properties.
10. High thermal coefficient of expansion.
11. High degree of smoke liberation in a fire

II. Taguchi Approach

Basically, experimental design methods were developed originally for . To solve this problem, the Taguchi method uses a special design of orthogonal array to study the entire parameter space with a small number of experiment only. The experimental result is then verified for a signal – to – noise (S/N) ratio to measure the quality characteristics deviating from the desired value here are 3 Signal-to-Noise ratio of common interest for optimization of Static Problem. The S/N ratio for each level of process parameter is compared. A statistically significant with the S/N and ANOVA analyses, the optimal combination of the process parameter can be predicted.

SMALLER IS BETTER

The signal-to-noise (S/N) ratio is calculated for each factor level combination. The formula for the smaller the better S/N ratio using base10 log is represented below

$$S/N = -10 \cdot \log(S^2/n)$$

Where Y = responses for the given factor level combination n = number of responses in the factor level combination.

III. An Orthogonal Array L₉ Formation

Table 1

TRIAL NO.	DESIGNATION	Speed	Feed	DOC
1	A1B1C1	1000	0.02	0.25
2	A1B2C2	1000	0.04	0.50
3	A1B3C3	1000	0.06	0.75
4	A2B1C2	1250	0.02	0.50
5	A2B2C3	1250	0.04	0.75
6	A2B3C1	1250	0.06	0.25
7	A3B1C3	1500	0.02	0.75
8	A3B2C1	1500	0.04	0.25
9	A3B3C2	1500	0.06	0.50

3.1. Surface Roughness And S/N Ratios Values For The Experiments

Table 2.

TRIAL NO.	DESIGNATION	speed	feed	Depth	Ra in microns	SNRA1
1	A ₁ B ₁ C ₁	1000	0.02	0.25	1.079	-0.660429
2	A ₁ B ₂ C ₂	1000	0.04	0.50	1.409	-2.97822
3	A ₁ B ₃ C ₃	1000	0.06	0.75	1.488	-3.45206
4	A ₂ B ₁ C ₂	1250	0.02	0.50	1.986	-5.95958
5	A ₂ B ₂ C ₃	1250	0.04	0.75	2.176	-6.75318
6	A ₂ B ₃ C ₁	1250	0.06	0.25	1.819	-5.19665
7	A ₃ B ₁ C ₃	1500	0.02	0.75	3.389	-10.6014
8	A ₃ B ₂ C ₁	1500	0.04	0.25	2.982	-9.49015
9	A ₃ B ₃ C ₂	1500	0.06	0.50	1.651	-4.35494

Response Table for Signal to Noise Ratios

3.2. Smaller is Better

Table 3.

Level	SPEED	FEED	DOC
1	-2.364	-5.740	-5.116
2	-5.970	-6.407	-4.431
3	-8.149	-4.335	-6.936
DELTA	5.785	2.073	2.505
RANK	1	3	2

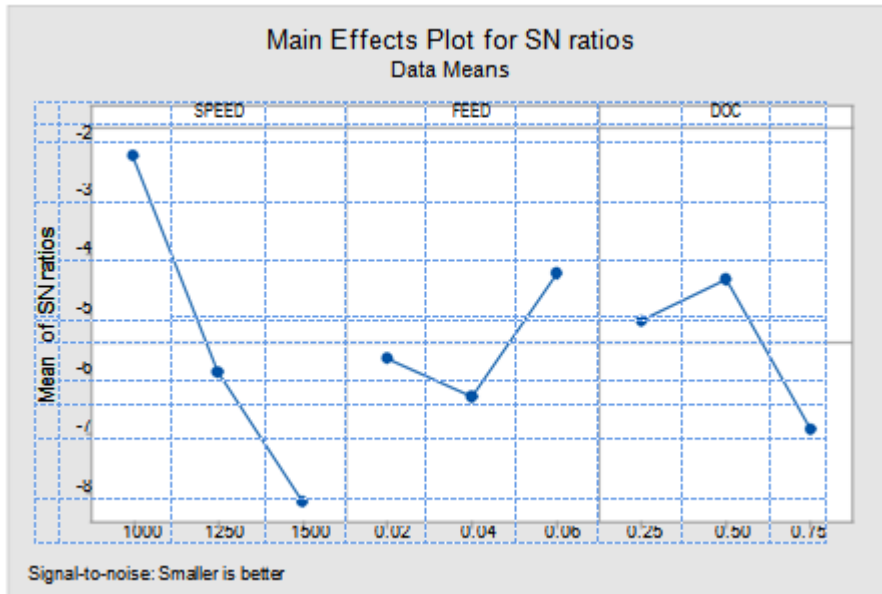


Figure 1.

IV. Analysis Of Variance For Machining Time

Analysis of Variance (ANOVA) results for the MACHINING TIME

Table 4.

SOURCE	DF	SEQ SS	ADJ SS	ADJMSS	F	P	% CONT
SPEED	2	1312.9	1312.9	656.4	3.24	0.236	4
FEED	2	33844.2	33844.2	16922.1	83.45	0.012	92
DOC	2	869.2	869.6	434.8	2.14	0.318	2
ERROR	2	405.6	405.6	202.8			2
TOTAL	8	36432.2					100

Analysis of Variance For Roughness

Analysis of Variance (ANOVA) results for the Roughness

Optimization of Glass Fibre Reinforced Polymeric Composite Material Using End Mill By Taguchi

Design of Experiment

Table 5.

SOURCE	DF	SEQ SS	ADJ SS	ADJ MS	F	P	%
SPEED	2	0.03104	0.003104	0.001552	0.61	0.622	10
FEED	2	0.17740	0.017740	0.008870	3.47	0.224	48
DOC	2	0.010598	0.010598	0.005299	2.07	0.325	28

ERROR	2	0.005108	0.005108	0.002554			14
TOTAL	8	0.36550					100

V. Result &Conclusion

After finding all the observation as given in table (3.2) & (6), and S/N ratio and means are calculated and various graph for analysis is drawn by using Minitab-15. The S/N ratio for Ra, Machining time and MRR is calculated on Minitab -15 Software using Taugchi Method.

The steps used are as follow In this study, the Taugchi technique and ANOVA were used to obtain optimal milling parameter of GFRP under dry conditions. The experimental results were evaluated using ANOVA. The following conclusion can be drawn. In this study, the Taugchi technique and ANOVA were used to obtain optimal Turning parameters in the Turning of GFRP under dry conditions.SEM analyzed were found for morphological characteristics.The experimental results were evaluated using Taguchi technique. The following conclusion can be drawn.

5.1 Optimal Control Factor

1. Surface Roughness-A1 (Speed -1000) B3 (Feed -0.06) C2 (DOC-0.50)
2. Machining Timing-A2 (Speed-1250) B1 (Feed 0.02) C3 (DOC0.75)
3. Material Removal Rate- A3 (Speed-1500) B2 (Feed 0.04) C1 (DOC 0.25)

5.2 Percentage of contribution of Process parameter

1. Surface Roughness- speed 60%
2. Machining Timing- Feed 92%
3. Material Removal –DOC-88%

References

- [1] Reddy Sreenivasulu Optimization of Surface Roughness and Delamination Damage of GFRP Composite Material in End Milling using Taguchi Design Method and Artificial Neural Network,Reddy Sreenivasulu Procedia Engineering 64 (2013) 785 – 794
- [2] B.V.Kavada*, A.B.Pandeya, M.V.Tadavia, H.C.Jakharia a A Review Paper on Effects of Drilling on Glass Fiber Reinforced Plastic2nd International Conference on Innovations in Automation and Mechatronics Engineering, ICIAME 2014
- [3] Procedia Technology 14 (2014) 457 – 464M.A. Amrana,b*, S. Salmaha, N.I.S. Husseina, R. Izamshahb, M. Hadzleyb, Sivaraosb,M.S. Kasimb, M.A. Sulaimanb Procedia Technology 14 (2014) 457 – 464
- [4] Harsh Y Valeraa*, Sanket N Bhavsara Experimental Investigation of Surface Roughness and Power Consumption in Turning Operation of EN 31 Alloy Steel Procedia Technology 14 (2014) 528 – 534
- [5] Surinder Kumar1*; Meenu Gupta2; P.S. Satsangi3 and H.K. Sardana4 Modeling and analysis for surface roughness and material removal rate in machining of UD-GFRP using PCD tool International Journal of Engineering, Science and Technology Vol. 3, No. 8, 2011, pp. 248-270
- [6] D.S. Rickerby, A Matthews, “Advanced Surface Coatings- A Handbook of Surface Engineering”, Chapman and Hall, New York, 1991.
- [7] B. Anjaneyulu, G. Nagamalleswara Rao, Dr. K. Prahladarao and D. Harshavardhan. Analysis of Process Parameters in Milling of Glass Fibre Reinforced Plastic Composites. International Journal of Mechanical Engineering and Technology, 8(2), 2017, pp. 149–159
- [8] A Review on Fiber Reinforced Concrete, Grija.S, Shanthini.D, Abinaya.S. International Journal of Civil Engineering and Technology, 7(6), 2016, pp.386–392.
- [9] A. Lakshumu Naidu, V. Jagadeesh and M V A Raju Bahubalendruni, A Review on Chemical and Physical Properties of Natural Fiber Reinforced Composites. International Journal of Advanced Research in Engineering and Technology, 8(1), 2017, pp 56–68.