

## Determination of Drag Coefficient for Hyundai Model Using the Strain Gauge Method

Abdessamed Kacem, Ali Najim Abdullah

<sup>1</sup>Ministry Of Higher Education/ Baghdad University

<sup>2</sup>Ministry Of Higher Education/ Al-Rafidain University College

Corresponding Author: Abdessamed Kacem

**Abstract:** The flow field around an automobile is very complex, characterized by a high degree of Three dimensionality, flow separation, reattachment and vortex formation. Flow visualization as well as flow simulation are helpful tools during the aerodynamic design of vehicles.

The research-undertaken deals with an experimental estimation of  $C_D$  (drag coefficient) for Hyundai car, (scale 1/30) using the strain gauge method (FLA-6-11 type, 120 $\Omega$ , 2.12 gauge factor, half-bridge connection), which was proved to be practical and reasonably accurate. Experiments were run within a subsonic aspiration wind tunnel, covering an air speed up to 33 m/s (i.e., Reynolds number  $6.6 \times 10^5$ ). Results for drag coefficient were obtained in the range of 0.96 to 0.39. It was noted that the magnitude of  $C_D$  decreased from 0.96 at 21.17 m/s to 0.39 at 33.00 m/s (i.e., decrease of drag coefficient by about 60%). Comparison of our results with those given by other authors is satisfactory.

**Keywords:** Strain gauge, Drag coefficient, Wind tunnel, Aerodynamics of automobile, Static loading, Dynamic loading, Half bridge connection.

Date of Submission: 26-04-2018

Date of acceptance: 14-05-2018

### I. Introduction

Recently the incentive to reduce the aerodynamic drag of road vehicles has increased again. Different methods to estimate drag coefficient of cars have been utilized in the past<sup>[1,2]</sup>. In the present paper, we use strain gauges with bending moment diagram in order to estimate drag coefficient, the matter that proved to be practical, accurate, and easy.

It is known that loads acting transversely to the plane of a large dimension cause a member to bend. A bar member subjected to this loading is called a beam. In order to resist these loads, a beam must be supported at one or positions along its length. If a beam has one end built-in, it is called a cantilever<sup>[3]</sup>. We used this idea in order to fix a model of a vehicle at a free end of a cantilever, and estimate the drag coefficient from bending moment diagram of the beam.

### II. The Experimental Equipment And Instrumentation

A subsonic wind tunnel, aspiration type, with a maximum speed of 33 m/s, was used. Its cross section and active length are respectively: 230x230 mm<sup>2</sup> and 500mm<sup>[4]</sup>. Four strain gauges, FLA-6-11, 120  $\Omega$ , 2.12  $\pm$ 1% gauge factor, wire gauge type were used, with adhesive P-2, and coefficient of thermal expansion=11.8x10<sup>-6</sup>/°C. The temperature coefficient of gauge factor is +0.1 $\pm$ 0.05%/10°C<sup>[5]</sup>. The sting made of hot rolled, medium carbon steel (0.45%C), damped effect,  $E=203.4 \times 10^9$  N/m<sup>2</sup>, and  $I_z=1.4426 \times 10^{-10}$  m<sup>4</sup>.

A model reproducing a Hyundai, made from wood, scale 1/30, and blockage ratio of 2.5% was tested. The extensometer bridge which was used, was provided with internal impedance of 120 $\Omega$  to 500 $\Omega$ , the range of  $\pm$ 20000 points, maximum resolution: 1 $\mu\Omega/\Omega$ , and Amplificatory linearity is 0.002%. The gauge factor regulator is 1 to 5 for 4 digits, and the excitation stability is 0.01%. The branching type is a half-bridge and full-bridge with analogical exit of 0-2V for 0-20000  $\mu\Omega/\Omega$ . The minimum charge is 2000 $\Omega$ , and passer band of analogical exit is 0 to 10 KHz<sup>[6]</sup>.

### III. The Experimental Procedure

Dimensions of the sting were chosen so as to reproduce minimum strain that we can read it via strain gauges. The model was fixed at the reference point of the sting as shown schematically in (fig.1a). From the bending moment diagram, (fig.1b), we can write  $M_o=F_Y.X_C+F_X.Y_C$ . The value of  $(F_Y.X_C)$  approaches to zero<sup>[3]</sup>. We need two equations in order to find the two unknowns  $F_X$  and  $M_o$ , and these two equations could be obtained via the sting in its vertical position. Experimental procedure for Hyundai model is shown in fig.(2).

**1-3-1 Drag force and fluid velocity calculation**

The model and four strain gauges were fixed-as shown before in (fig.1a)-at reference point (O), (B), and (A) respectively.  $L_a$  is the distance of strain gauge (A) from the reference point (O).  $L_b$  is the distance of strain gauge (B) from the reference point (O). From the bending moment diagram, (fig.1b), we have:

$$M_A = M_O + F_X \cdot L_a \tag{1}$$

$$M_B = M_O + F_X \cdot L_b \tag{2}$$

$M_A$ ,  $M_B$  have direct relationship with readings of strain gauges  $\epsilon_A$ ,  $\epsilon_B$  respectively as shown in subsequent equations:

$$\epsilon_A = \sigma_A/E = M_A \cdot h / 2 I_z \cdot E \implies M_A = 2 I_z E \epsilon_A / h \tag{3}$$

$$\epsilon_B = \sigma_B/E = M_B \cdot h / 2 I_z \cdot E \implies M_B = 2 I_z E \epsilon_B / h \tag{4}$$

Where  $I_z$  represents the second moment of area for the sting around Z-axis as shown schematically in (fig.3). By solving equations (1) and (2), we can find the unknowns  $F_X$  and  $M_O$ . Drag coefficient could be estimated by the relationship:

$$C_D = F_X / 0.5 \rho V_\infty^2 A \tag{5}$$

And fluid velocity (air-speed) could be estimated by:

$$V_\infty = \sqrt{2g(\rho_w / \rho_a)\Delta h} \tag{6}$$

**1-3-2 Deviation analysis for measurements**

From equation (6):

$$V = \text{constant} \times \sqrt{H}$$

$$\ln V = \ln \text{constant} + \ln H^{1/2} \tag{7}$$

By differentiating the equation logarithmically

$$dV/V = 0.5 \times dH/H$$

Where  $dH$  represents the absolute error ratio in total pressure head that could be estimated:

$$dH = \sqrt{(H - H_m)^2 + (\delta H)^2}$$

Where  $H$  represents the total head. Deviation analysis for drag force measurements could be estimated from:

$$dF_X / F_X = \pm \sqrt{(d\epsilon_A / \epsilon_A)^2 + (d\epsilon_B / \epsilon_B)^2} \tag{8}$$

Deviation analysis for drag coefficient could be estimated from:

$$dC_D / C_D = \pm \sqrt{(dF_X / F_X)^2 + (2dV / V)^2} \tag{9}$$

**IV. Results And Discussion**

Experiments were run at an air speed from 21.17 m/s to 33.00 m/s (i.e., Reynolds number from  $1.97 \times 10^5$  to  $3.07 \times 10^5$ ) as shown in figure (4). Results for drag coefficient were obtained in the range of 0.96 to 0.39 as shown in figure (5). It was noted that the value of  $C_D$  decreased from 0.96 at 21.18 m/s to 0.39 at 33.00 m/s (i.e., decrease of drag coefficient by about 59% within the range of an air speed of 12 m/s).

Such low drag coefficient value of 0.39 is due to the effects by of backlight, which are eliminated on the axial force reduction that resulted from its existence. Figures (6) and (7) show that the flow around the model generates a wake vortex system. There are four distinct vortices in this system. Air coming off the top or rear deck, curves downward to curl back toward the back panel to generate the standing vortex A. Analogously a similar vortex B is formed by air coming upward from underneath the car. Usually the core of the upper vortex A will be downstream from that of B. Similarly, horizontal vortices C are formed at the junction of the sides and back of the body. These are attached to the body and travel with it. These results agree with those of reference [7] (It is believed that all sedan type automobile generate an aerodynamic lift effect which creates the trailing vortices that spiral downstream from the body).

Figure (8) shows variation of strain with an air-speed for passenger car model (Hyundai), while figure (9) shows that  $dV/V$  ratio varies from  $\pm 3.57\%$  to  $\pm 1.47\%$  (i.e., decreases by 59%), while  $dF_X/F_X$  varies from  $\pm 20.83\%$  to  $\pm 8.36\%$  (i.e., decreases by 60%), and  $dC_D/C_D$  ratio varies from  $\pm 22.00\%$  to  $\pm 8.86\%$  (i.e., decreases by 59%), at the working range of an air speed.

**V. Conclusion**


The re-circulating bubble or spiral vortices determine the drag and stability. From the flow visualization that consolidated with the strain gauge method results, it can be seen that as the size of vortices are small, the drag coefficients are low.

**Notations**

- $F_X$ : Total drag force (N).
- $F_Y$ : Lift force (N).
- $M_A$ : moment at A (N.m).
- $M_B$ : moment at B (N.m).
- $M_O$ : Pitching moment (N.m).
- $\epsilon_A$ : Strain at strain gauge A ( $\mu$  strain).
- $\epsilon_B$ : Strain at strain gauge B ( $\mu$  strain).
- $E$ : Young modulus of elasticity (N/m<sup>2</sup>).
- $(X_C, Y_C)$ : Centroid co-ordinates of the sting.
- $I_z$ : Second moment of area (m<sup>4</sup>).
- $\sigma_A$ : Stress at A (N/m<sup>2</sup>).
- $\sigma_B$ : Stress at B (N/m<sup>2</sup>).
- $b$ : Width of beam (m).
- $h$ : Thickness of beam (m).
- $\rho_a$ : Air density (kg/m<sup>3</sup>).
- $\rho_w$ : Water density (kg/m<sup>3</sup>).
- $V_\infty$ : Undisturbed air flow (m/s).
- $g$ : Gravitational acceleration (m/s<sup>2</sup>).
- $\Delta h$ : Head difference (m H<sub>2</sub>O).
- $C_D$ : Drag coefficient.
- $A$ : The model frontal area (m<sup>2</sup>).
- $L_a$ : The distance of strain gauge A from the reference point (O).
- $L_b$ : The distance of strain gauge B from the reference point (O).
- Subscript (O): Reference point (model fixing position on the sting at the back of the model).

**References**

- [1] Itsuhei Kohri, Teppei Yamanashi & Takayoshi Nasu, "Study on the transient behavior of the vortex structure behind Ahmed body", SAE 2014.
- [2] Muzafferuddin Mahmood, "flow visualization in Wind Tunnels", 2011.
- [3] M.J.Iremonger, "Basic Stress Analysis", 1984.
- [4] DeltaΔLab, "Soufflerie Subsonique a aspiration EA600", France 2014.
- [5] Tokyo Sokki Kenkyujo Co. "TML Strain Gauge Test Data", Japan, 2015.
- [6] DeltaΔLab, "Pont D'Extensometrie EI 616", France 2014.
- [7] Mohan Jagadeesh Kumar M, Anoop Dubey, Shashank Chheniya & Amar jadhav, "Effect of vortex generators on Aerodynamics of a car: CFD Analysis", International Journal of Innovations in Engineering and Technology (IJJET), 2013.

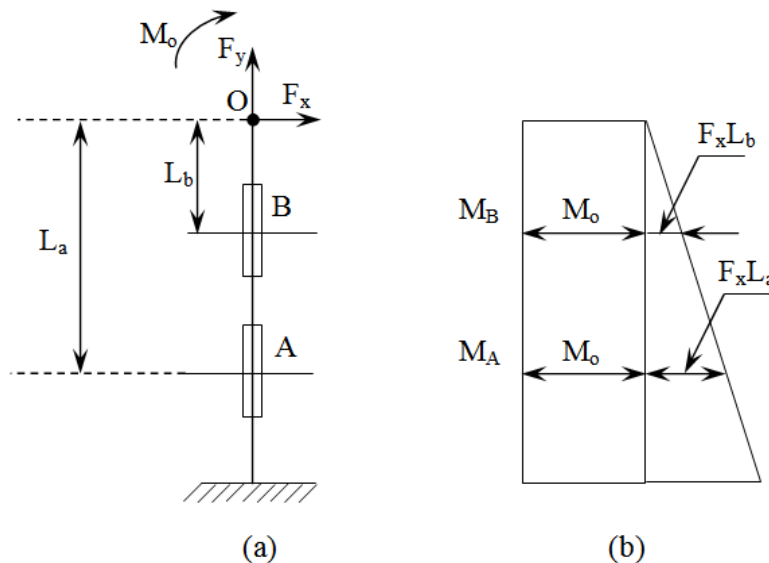

**Figure (1):** (a) The vertical position of the sting (schematically)  
 (b) The bending moment diagram for the sting

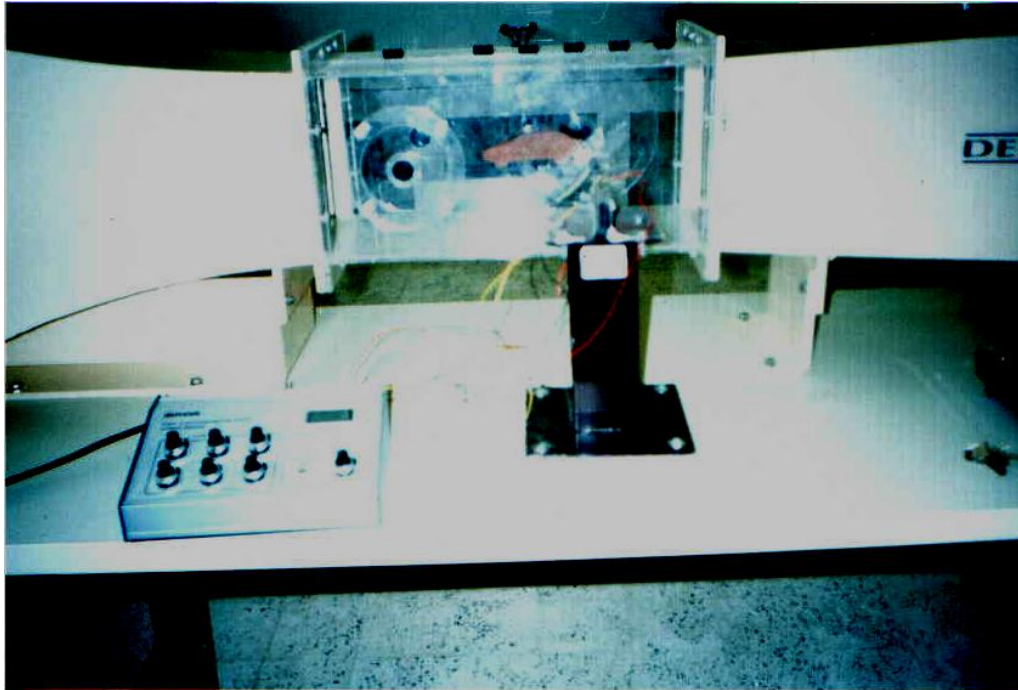


Figure (2): Experimental procedure for Hyundai model

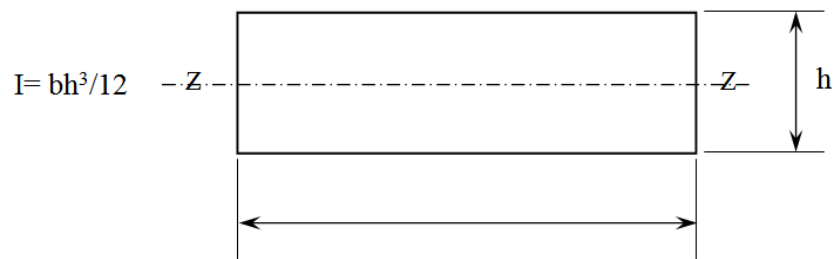


Figure (3): The second moment of area for the sting

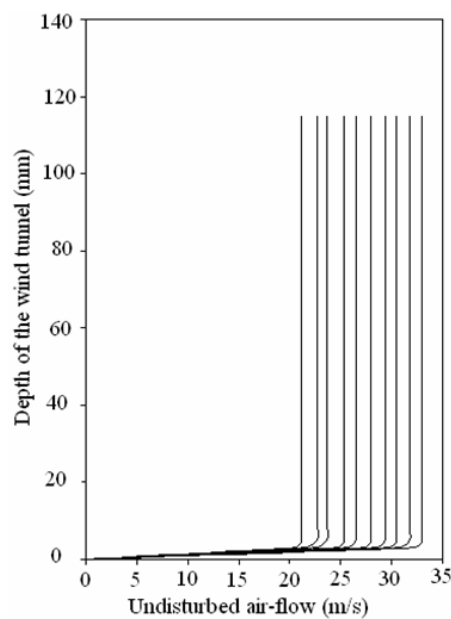


Figure (4): Velocity distribution within the test section. From calibration of the wind tunnel

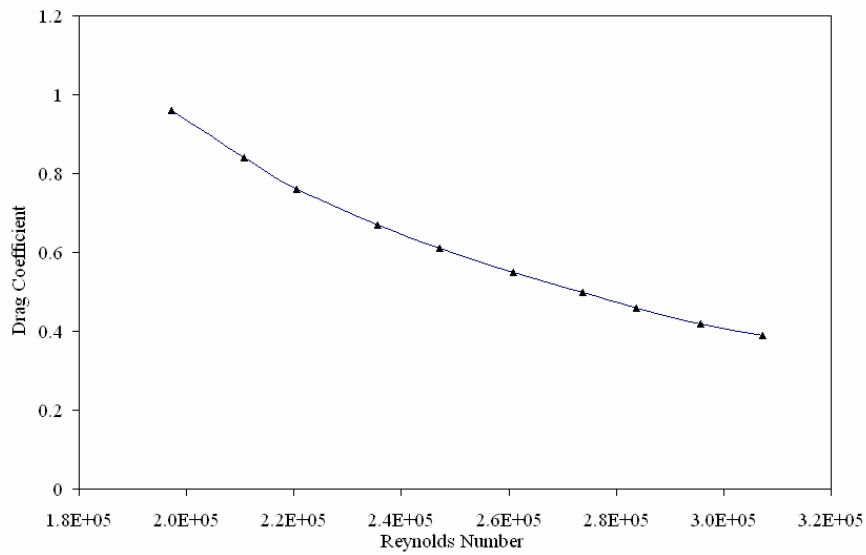


Figure (5): Drag coefficient versus air speed

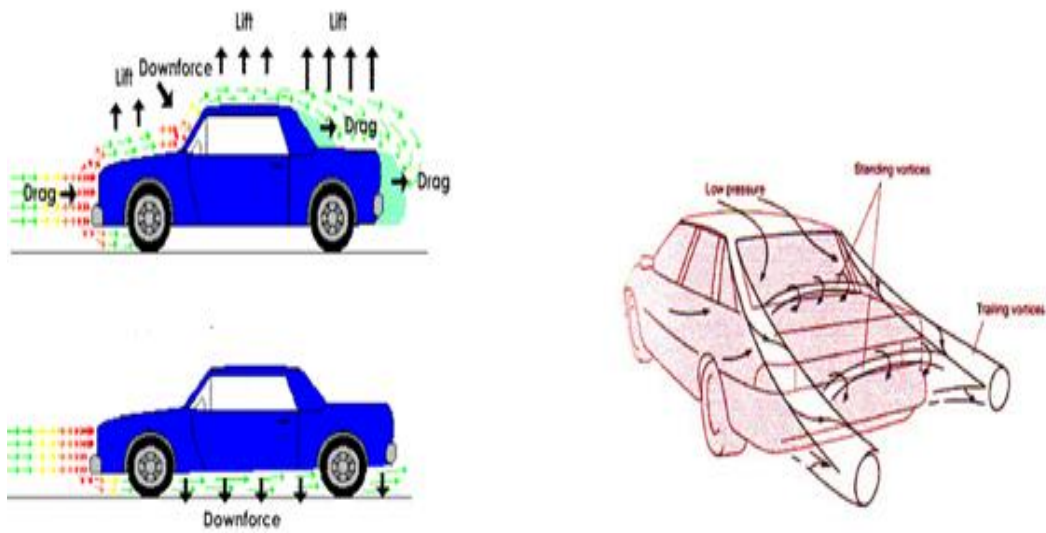


Figure (6): Scheme for the trailing vortices at the rear part of the vehicle



Figure (7) Flow visualization around Hyundai model

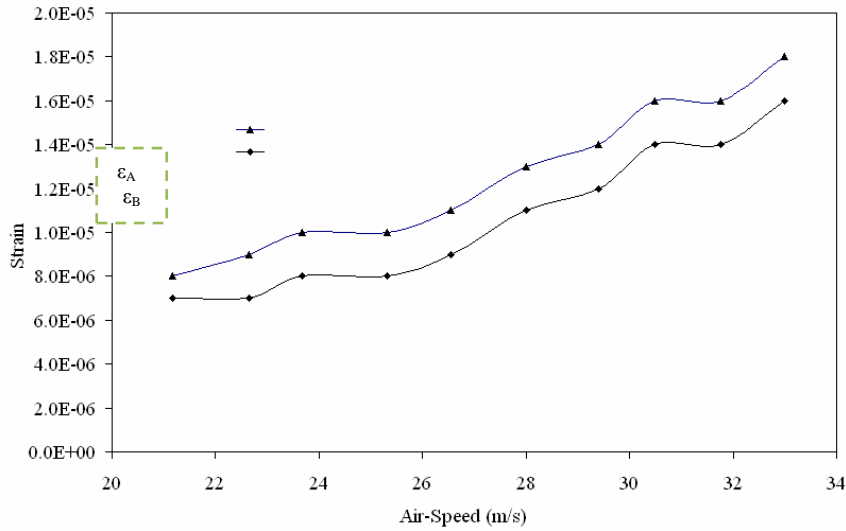


Figure (8): Variation of strain with an air-speed for three-box form Passenger car model (Hyundai)

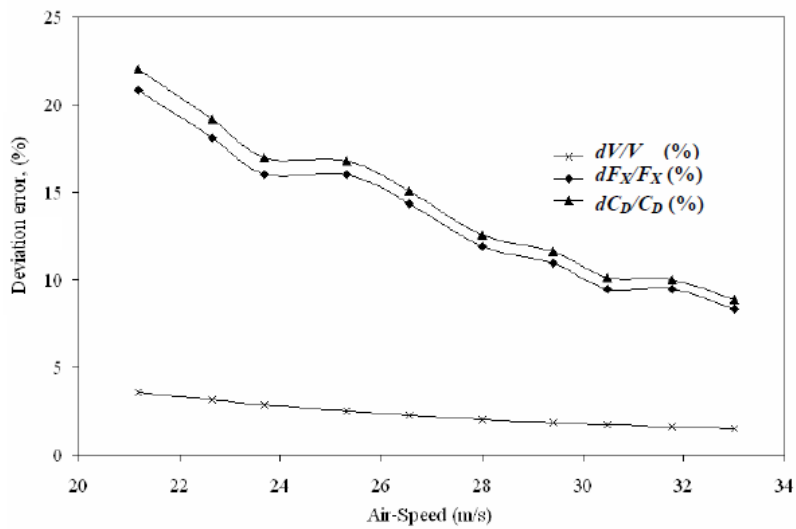


Figure (9): Variation of errors deviation with an air-speed for Hyundai model

Abdessamed Kacem." Determination of Drag Coefficient For Hyundai Model Using The Strain Gauge Method ." IOSR Journal of Mechanical and Civil Engineering (IOSR-JMCE) , vol. 15, no. 3, 2018, pp. 23-28